TEMPORARY TRAFFIC CONTROL TYPICAL APPLICATION

IMPORTANT:

THIS DRAWING SHALL BE USED IN COMBINATION WITH THE GENERAL NOTES AT THE BEGINNING OF STANDARDS MD 104.00.

NOTES:

A 6 FOOT WIDE MINIMUM PEDESTRIAN PATH SHALL BE PROVIDED.

PEDESTRIAN PATH SHALL BE ACCESSIBLE
TO PHYSICALLY HANDICAPPED PERSONS
IN WHEELCHAIRS. CURB TRANSITION
WIDTH SHALL BE 4 FT. WIDE MINIMUM.
RAMP TRANSITION SHALL HAVE A DOWNWARD
SLOPE OF 12:1 MAX. AND BE CONSTRUCTED
OF HOT MIX ASPHALT.

KEY:






DIRECTION OF TRAFFIC

WORK SITE

PARKING SPACES

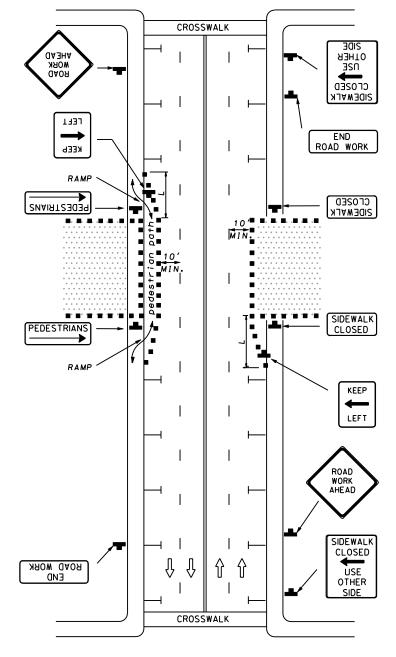

SPECIFICATION CATEGORY CODE ITEMS

104

APPROVED

DIRECTOR - OFFICE OF TRAFFIC AND SAFETY

APPROVAL • SHA
REVISIONS

REVISIONS

HIGHWAY ADMINISTRATION

HIGHWAY ADMINISTRATION

APPROVAL • SHA APPROVAL • FEDERAL HIGHWAY ADMINISTRATION
APPROVAL 9-10-96 APPROVAL 9-27-96
REVISED REVISED REVISED
REVISED REVISED
REVISED REVISED
REVISED REVISED

Maryland Department of Transportation STATE HIGHWAY ADMINISTRATION

STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES
PED AND CURB-LANE CONTROL/MULTILANE
UNDIV. ALL SPEEDS/OVER 12 HRS.
OR NIGHTTIME USE

STANDARD NO.

MD 104.80